


## CL-3W-UPGB

### Features:

- Very Long operating life
- Highest flux
- Available in Pure Green
- Lambertian radiation pattern
- More energy efficient than incandescent and most halogen lamps
- Low voltage DC operated
- Cool beam, safe to the touch
- Instant light (less than 100ns)
- Fully dimmable
- No UV
- Lower Rth
- ROHS compliant



### Radiation Pattern

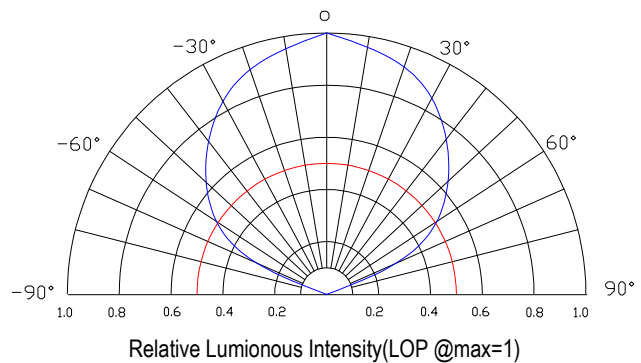

### Package Dimensions

### Applications

- Reading lights(car, bus, aircraft)
- LCD Backlights /light Guides
- Fiber optic alternative/Decorative/Entertainment
- Mini-accent/Up lighters/Down lighters/ Orientation
- Indoor/Outdoor commercial and Residential Architectural
- Cove/Under shelf /Task
- Bollards/Security/Garden
- Portable (flashlight, bicycle)
- Edge-lit signs (Exit, point of sale)
- Automotive Exit (stop -tail-Turn ,CHMSL,Mirror Side Repeat)
- Traffic signaling /Beacons/rail Crossing and Wayside



# HIGH POWER

■ Typical Optical/Electrical Characteristics@T<sub>J</sub>=25°C

| Item                                | symbol            | Condition             | Min | Typ | Max | Unit |
|-------------------------------------|-------------------|-----------------------|-----|-----|-----|------|
| Forward Voltage                     | V <sub>F</sub>    | I <sub>F</sub> =350mA |     | 3.4 | 3.6 | V    |
| Reverse Current                     | I <sub>R</sub>    | V <sub>R</sub> =5V    |     |     | 50  | uA   |
| 50% Power Angle                     | 2θ <sub>1/2</sub> | I <sub>F</sub> =350mA | 110 | 120 | 130 | deg  |
| Luminous Intensity                  | Φ <sub>v</sub>    | I <sub>F</sub> =350mA | 90  | 100 | -   | LM   |
| Recommend Forward Current           | I <sub>F</sub>    |                       |     | 350 |     | mA   |
| Wave length                         | λ <sub>d</sub>    | I <sub>F</sub> =350mA | 515 | 520 | 525 | nm   |
| Thermal Resistance,Junction to Case | R <sub>jp</sub>   | I <sub>F</sub> =350mA |     | 10  |     | °C/W |

- Notes: 1. Tolerance of measurement of forward voltage ± 0.1v;  
 2. Tolerance of measurement of peak Wavelength ± 2.0nm;  
 3. Tolerance of measurement of luminous intensity ± 15%;

■ Absolute Maximum Rating

| Item                        | symbol           | Absolute Maximum Rating | Unit |
|-----------------------------|------------------|-------------------------|------|
| Forward Current             | I <sub>F</sub>   | 350                     | mA   |
| Peak Forward Current*       | I <sub>FD</sub>  | 500                     | mA   |
| Reverse Voltage             | V <sub>R</sub>   | 5                       | V    |
| Power Dissipation           | P <sub>D</sub>   | 1000                    | mW   |
| Operation Temperature       | T <sub>OPR</sub> | -30°C to +80°C          |      |
| Storage Temperature         | T <sub>STG</sub> | -40°C to +100°C         |      |
| Lead Soldering Temperature* | T <sub>SOL</sub> | 260°C for 3 Seconds Max |      |

- IFP Conditions :Pulse Width ≤ 10 msec duty ≤ 1/10
- All high Power emitter LED products mounted on aluminum metal-core printed circuit board, can be lighted directly ,but we do not recommend lighting the high power products for more than 5 seconds without a directly,but we do not recommend lighting the high powe products for more than 5 seconds without a appropriate heat dissipation equipment.
- Re-flow, wave peak and soak-stannum soldering etc. is not suitable for this products.
- Suggest to solder it by professional high power LED soldering machine.
- Can use invariable -temperature searing-iron with soldering condition: ≤ 260 degreeen less than 3 seconds.

# HIGH POWER

■ Typical optical/Electrical Characteristics Curves (Tj=25°C Unless Otherwise Noted)

