



Data Sheet

Customer: _____

Part No: _____

CL-SFC506RGB-01

Sample No: _____

Description: _____

5050 SMD Full Color

Item No: _____

Customer			
Check	Inspection	Approval	Date

Features:





- . Reflow Solderable
- . High Luminous Intensity and Low Power Dissipation
- . Good Reliability and Long Life
- . Complied With RoHS Directive

Technical Data Sheet

This product is generally used as indicator and luminary for electronic equipment such as household appliance, communication equipment, and dashboard.

Applications

- Optical indicator
- Indoor display
- Backlighting in dashboard and switch
- Flat backlighting for LCD, symbol and display
- General use

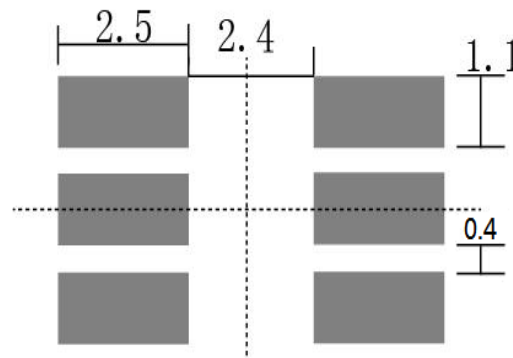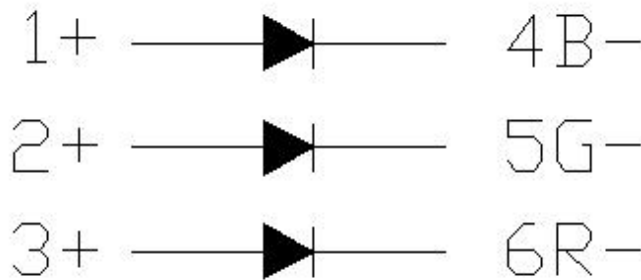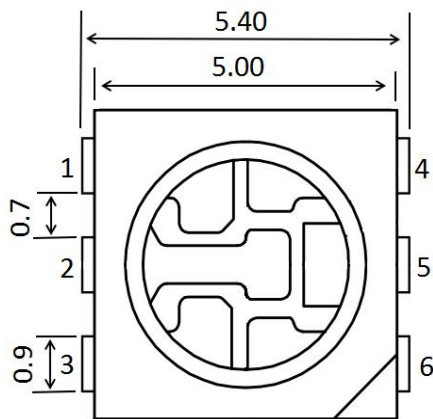

Notes:

1. All dimension units are millimeters.
2. All dimension tolerance is $\pm 0.2\text{mm}$ unless otherwise noted.

Selection Guide

Part No.	Dice	Lens Type	Luminous intensity(mcd) @ 20mA			Viewing Angle
			Min	Typ	Max	2θ1/2
CL-SFC506RGB-01	(R) AlGaInP	Water Clear	600	--	1300	120
	(G) InGaIn		780	--	1700	
	(B) InGaIn		350	--	780	

Note:

- 1.1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
- 2.the above luminous intensity measurement allowance tolerance $\pm 10\%$

Electrical / Optical Characteristics at Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Units	test conditions
Forward Voltage	R	1.8	--	2.4	V	IF=20mA
	G	2.8	--	3.4		
	B	2.8	--	3.4		
Reverse Current	IR	--	--	10	uA	VR = 5V
Dominate Wavelength	R	620	--	625	nm	IF=20mA
	G	525	--	527.5		
	B	465	--	470		

Absolute Maximum Ratings at Ta=25°C







Parameter	Symbol	Rating	Units
Power Dissipation	R	48	mW
	G	68	
	B	68	
DC Forward Current	IF	20	mA
Reverse Voltage	R	75	V
	G	100	
	B	100	
Operating Temperature	Topr	-40~+85	°C
Storage Temperature	Tstg	-40~+100	°C

Note:

1. 1/10 Dut cycle,0.1ms pulse width.
2. The above forward voltage measure ment allowance tolerance $\pm 0.1V$.
3. The tolerance of wave length: $\pm 1nm$.

Typical optical characteristics curves

Ambient Temperature VS. Forward Current

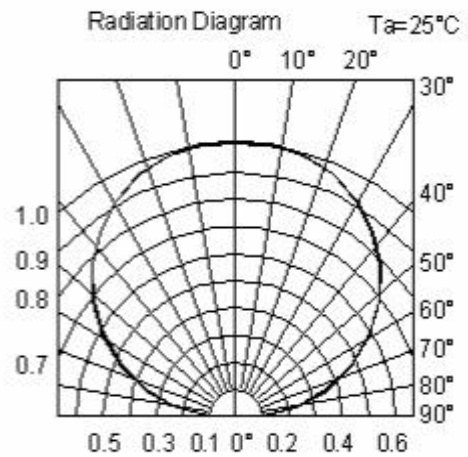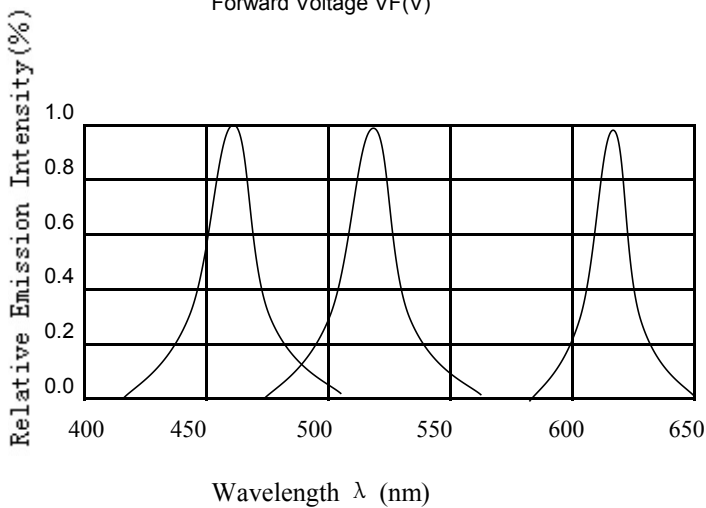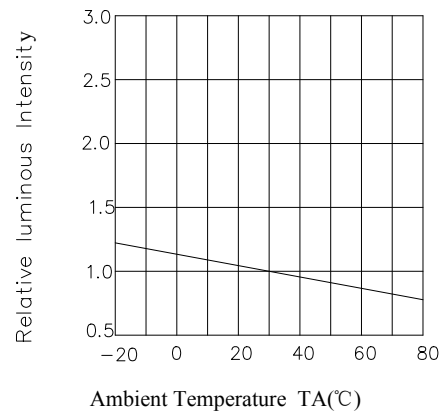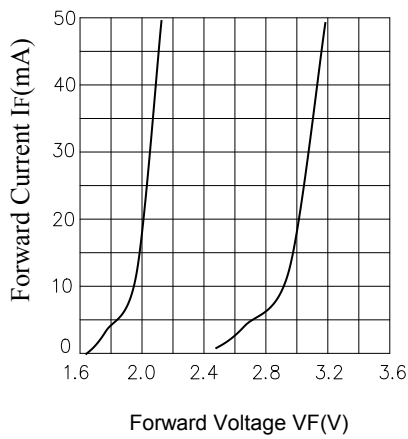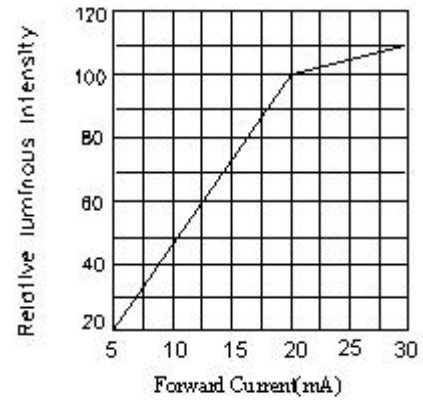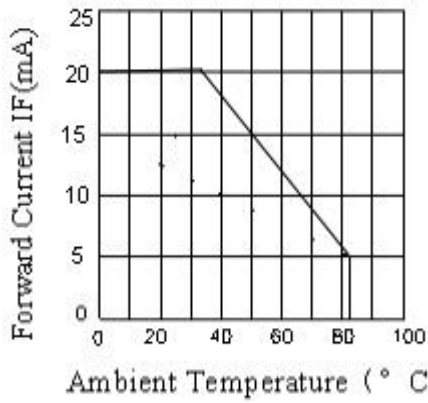

BIN CODE LIST(R)

Luminous Intensity(IV)				
BIN CODE	MIN	MAX	Unit	IF
I	600	780	mcd	20mA
J	780	1000		
K	1000	1300		
L	1300	1700		

Tolerance on each Intensity bin is: +/-10%

Forward Voltange(VF)				
BIN CODE	MIN	MAX	Unit	IF
0	1.8	2.0	V	20mA
1	1.9	2.1		
2	2.1	2.2		
3	2.2	2.3		
4	2.3	2.4		

Tolerance on each Forward Voltage bin is: +/-0.1V

Dominant Wavelength(Hue)				
BIN CODE	MIN	MAX	Unit	IF
P	620	625	nm	20mA

Tolerance for each Dominate Wavelength bin is: +/- 1nm

BIN CODE LIST(G)

Luminous Intensity(IV)				
BIN CODE	MIN	MAX	Unit	IF
I	780	1000		
J	1000	1300	mcd	20mA
K	1300	1700		

Tolerance on each Intensity bin is: +/-10%

Forward Voltange(VF)				
BIN CODE	MIN	MAX	Unit	IF
1	2.8	2.9	V	20mA
2	2.9	3.0		
3	3.0	3.1		
4	3.1	3.2		
5	3.2	3.3		
6	3.3	3.4		

Tolerance on each Forward Voltage bin is: +/-0.1V

Dominant Wavelength(Hue)				
BIN CODE	MIN	MAX	Unit	IF
P	525	527.5	nm	20mA

Tolerance for each Dominate Wavelength bin is: +/- 1nm

BIN CODE LIST(B)

Luminous Intensity(IV)				
BIN CODE	MIN	MAX	Unit	IF
L	350	460	mcd	20mA
M	460	600		
N	600	780		

Tolerance on each Intensity bin is: +/-10%

Forward Voltange(VF)				
BIN CODE	MIN	MAX	Unit	IF
1	2.8	2.9	V	20mA
2	2.9	3.0		
3	3.0	3.1		
4	3.1	3.2		
5	3.2	3.3		
6	3.3	3.4		

Tolerance on each Forward Voltage bin is: +/-0.1V

Dominant Wavelength(Hue)				
BIN CODE	MIN	MAX	Unit	IF
P	465	470	nm	20mA

Tolerance for each Dominate Wavelength bin is: +/- 1nm

Reliability Test Items And Conditions

Test Items	Ref.Standard	Test conditions	Time	Quantity	Ac/Re
Reflow	JESD22-B106	Temp:260°C max T=10 sec	3 times.	22Pcs.	0/1
Temperature Cycle	JESD22-A104	100°C±5°C 30 min. ↑↓5 min -40°C±5°C 30 min.	100 Cycles	22Pcs.	0/1
High Temperature Storage	JESD22-A103	Temp:100°C±5°C	1000Hrs	22Pcs.	0/1
Low Temperature Storage	JESD22-A119	Temp:-40°C±5°C	1000Hrs	22Pcs.	0/1
Life Test	JESD22-A108	Ta=25°C±5°C IF=20mA	1000Hrs	22Pcs.	0/1
High Temperature High Humidity Life Test	JESD22-A101	85°C±5°C/ 85%RH IF=20mA	1000Hrs	22Pcs.	0/1

Criteria For Judging Damage

Test Items	Symbol	Test conditions	Criteria For Judgement	
			Min.	Max.
Forward Voltage	VF	IF=20mA		U.S.L*)x1.1
Reverse Current	IR	VR = 5V		U.S.L*)x2.0
Luminous intensity	med	IF=20mA	L.S.L*)x0.7	


U.S.L: Upper standard level

L.S.L: Lower standard level

The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products.It does not constitute the warranting of industrial property nor the granting of any license.

SMT Reflow Soldering Instructions SMT

1. For secondary high temperature welding, please complete within 24 hours.
2. When soldering, do not put stress on the LEDs during heating.

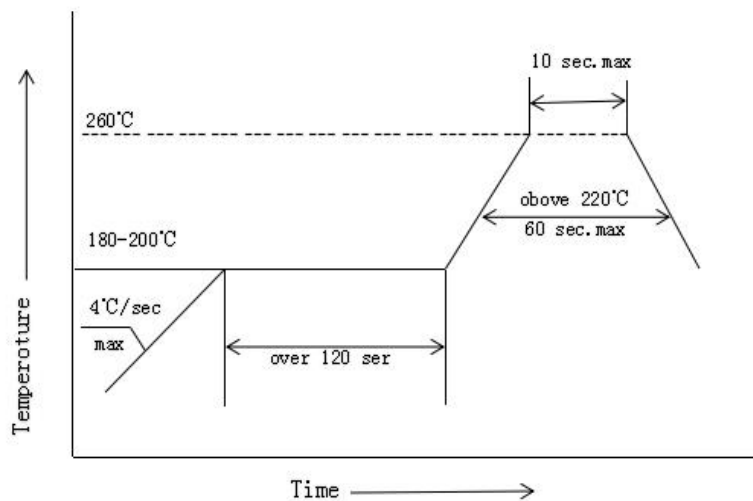


Soldering iron

1. When hand soldering, the temperature of the iron must be less than 315°C for 3 seconds.
2. The hand solder should be done only one time.

Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as shown in the figure below). It should be confirmed in advance whether the characteristics of LEDs will or will not be damaged by repairing.

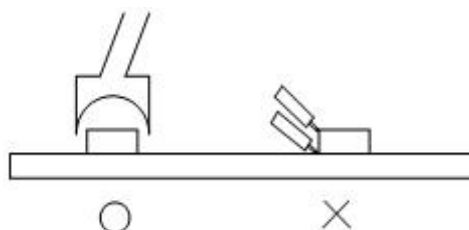

Storage

This product uses sealing anti-moisture antistatic packaging, and with desiccant, humidity card.

Before packaging is opened:

- 1、 The storage environment is: the ambient temperature should be maintained between 5 °C and 30 °C, and the relative humidity should be maintained within 60 % RH. When the storage time of the product exceeds 2 months, the product must be rebaked for use.
- 2、 Please check that the package is leaking before opening. If it has leaked, please re-bake and use it or return to the plant to dehumidify.

After opening the package:

1、 After opening the package, check whether the humidity card has a discoloration phenomenon. For example, 20 % of the humidity card indicates discoloration. Please remove the material from the bag and use it after dehumidifying 24H at 65 °C. (To reduce the risk of use, it is recommended that this product be dehumidified at 65 °C / 24H before use)

2、 Environmental conditions: The ambient temperature should be kept between ≤ 30 ° C and relative humidity

The lower 60 % RH should be maintained.

3、 if the material is not produced after exposure in the workshop for more than 24 hours, the product must be put back in the oven, dehumidified with 65 °C 24H, and then can be used again. If the material is not produced after 48 hours of exposure in the workshop, return the material to the SMD plant for high temperature dehumidification.

4、 When the material is dehumidified, please do not open the oven in the middle, so that the oven temperature will not drop to the dehumidification effect.

Please refer to the following operating methods when the material needs to be dehumidified



Correct way: material desiccant need to remove the bag, use the way of hanging baked

Wrong way: the material is dehumidified without removing the bag, in a stacking manner

ESD


Static Electricity will damage the LED.

The following steps can reduce the likelihood of ESD causing product damage

- 1.All productive machinery and test instruments must be electrically grounded.
- 2.Use a conductive wrist band or anti-electostatic glove when handling these LEDs.
- 3.Manintain a humidity level of 50%RH or higher in production areas.
- 4.Use anti-static packaging for transport and storage.

Handling Precautions

- 1.Do not stack the assembled PCB together. This may scratch the surface of the product or damage the circuit.




- 2.Not available in the situation of acidity for PH.



- 3.Electrostatic sensitive device



Package: 1000pcs/reel

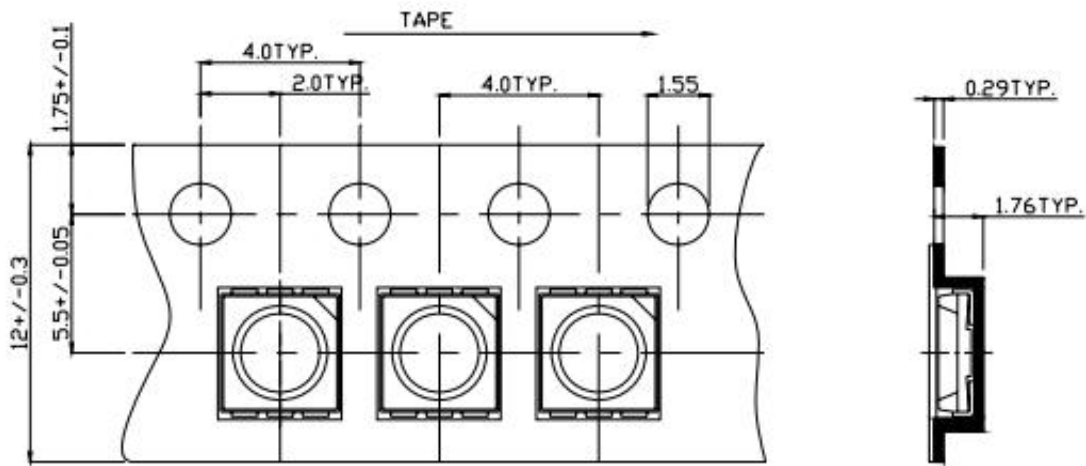

Note: The tolerances unless mentioned is $\pm 0.1 \text{ mm}$, Unit: mm

Moisture Resistant Packaging

