


WJ3EDGRHM-7.62  
PLUG-IN TERMINAL BLOCK



PCB connector  
 Rated current: 41 A  
 Rated voltage: 300 V  
 Pitch: 7.62 mm  
 Mounting: Wave soldering

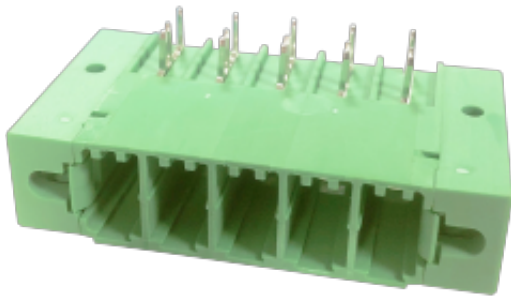

For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	150	300
Rated Current [A]	41	41	10
Wire Range [AWG]		/	
Dielectric Voltage-Withstand		1.6KV	

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	630	630	1000
Rated Current [A]	41	41	41
Impulse withstand voltage [KV]	6	6	6
Conductor cross section[solid/flexible] [mm²]		/	

Material

Insulation Material	PA66
---------------------	------


Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

### Other Data

Pitch/Poles [mm]/[P]	7.62/2-12
Stripping Length [mm]	/
Screw/Torque(Max)[N.m]	/
Operating temperature [°C]	-40~+105
Soldering temperature	260°C/5S
Pin dimensions [mm]	0.8*1.0
PCB Hole Diameter [mm]	Ø1.6

### Dimensions

### PCB opening diagram

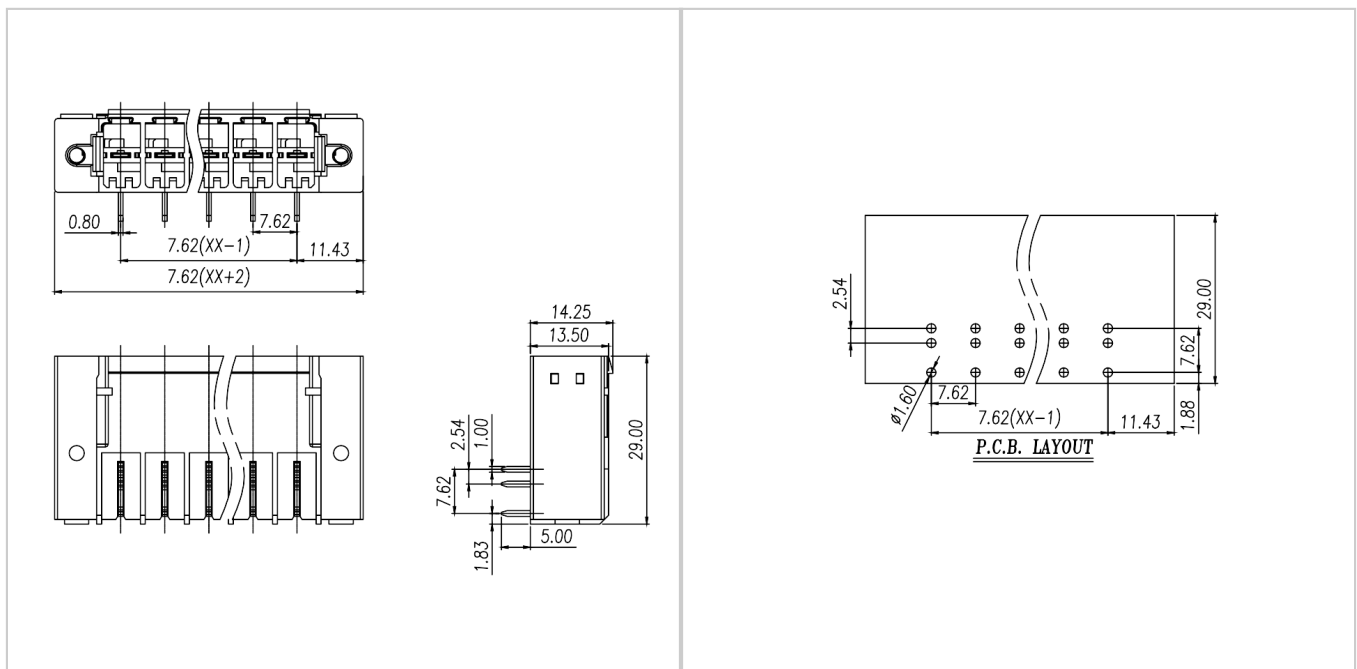

### Accessories

WJ3EDGRHM-7.62  
PLUG-IN TERMINAL BLOCK

---



[WJ3EDGKHM-7.62](#)