



Data Sheet

Customer: _____

Part No: _____

CL-5013LUYC1H-003

Sample No: _____

Description: _____

5Ø Lamp Yellow Color

Item No: _____

Customer			
Check	Inspection	Approval	Date

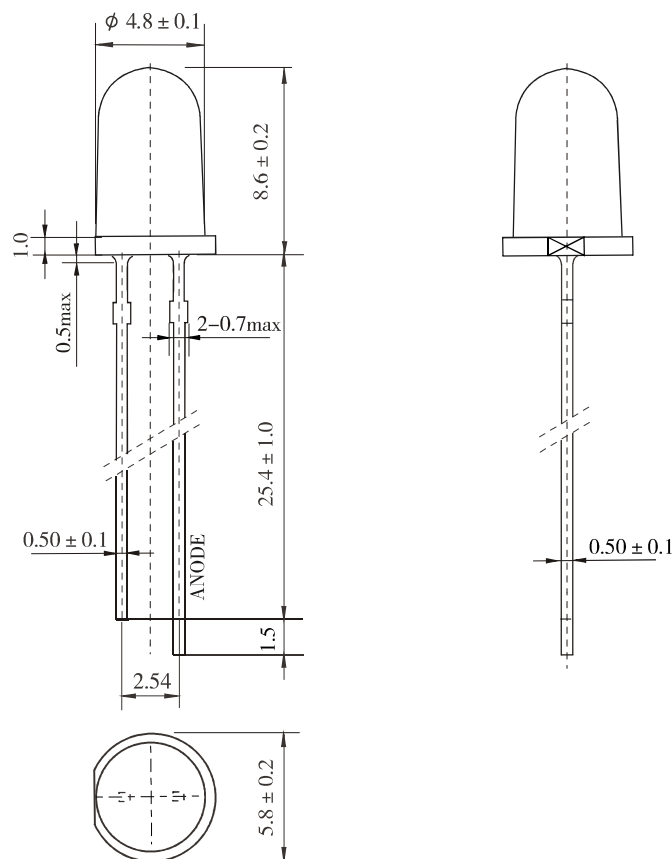
Features

- Low power consumption
- High Efficiency
- Round type
- T1 (5mm) diameter
- With Flange
- Solder leads without stand-off
- Compliant with RoHS

Descriptions

- Chip Material: AlGaInP/GaAs
- Emitting Color: Yellow
- Lens Color: Water Clear

Outline Drawing



ATTENTION



OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE DEVICES

Tolerance is $\pm 0.25\text{mm}$
Unless Otherwise Specified.

Electrical Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Forward Voltage	V_F	---	2.0	2.4	V	IF=20mA
Luminous Intensity	I_v	3750	7770	---	mcd	IF=20mA
Peak Wavelength	λ_P	---	592	---	nm	IF=20mA
Dominant Wavelength	λ_d	---	590	---	nm	IF=20mA
Spectral Line half-width	$\Delta \lambda$	---	20	---	nm	IF=20mA
Reverse Leakage Current	I_R	---	---	50	μA	VR=5V
Viewing Angle	$2 \theta_{1/2}$	---	15	---	Deg	IF=20mA

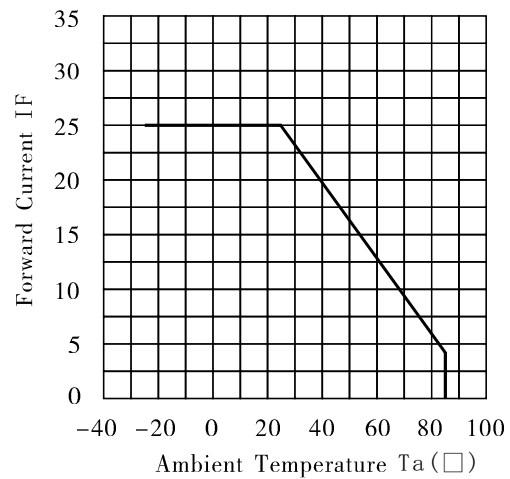
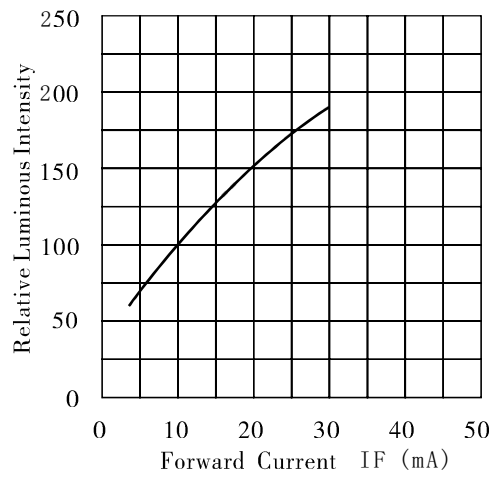
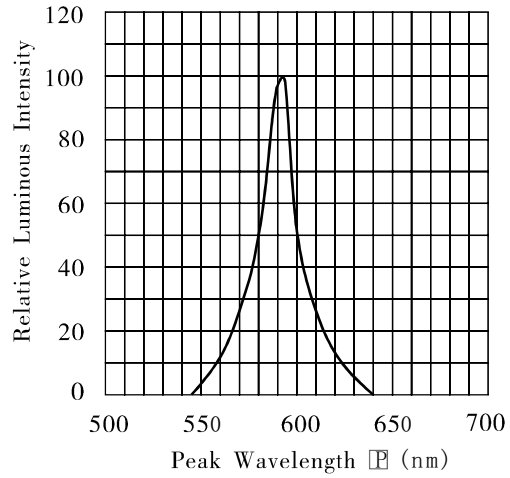
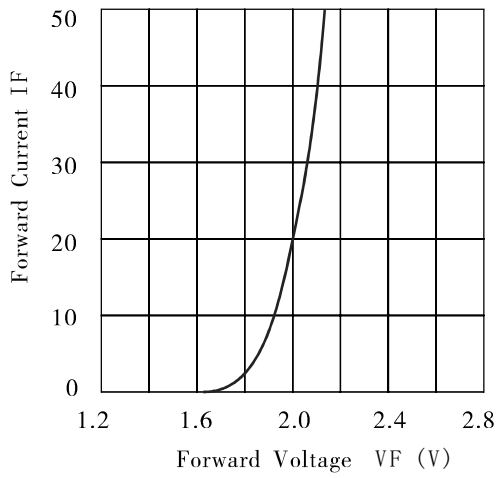
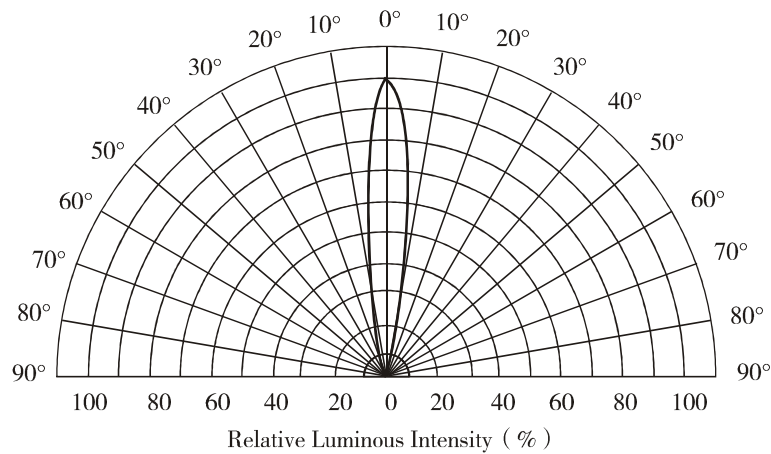
Absolute Maximum Parameters (Ta=25°C)

Parameter	Symbol	Condition	Rating	Unit
Power Dissipation	P_D	---	60	mW
Reverse Voltage	V_R	---	5	V
Forward Average Current	I_F	---	25	mA
Temperature coefficient	I/C	---	0.33	mA/ °C
Pulse Current	IFP	Duty=1/10,1kHz	100	mA
Operating Temperature Range	T_{opr}	---	-25 ~ +85	°C
Storage Temperature Range	T_{stg}	---	-30 ~ +100	°C
Soldering Condition	T_{sd}	---	260°C/5sec	°C

NOTE:

Luminous Intensity Measurement allowance is $\pm 10\%$.

$2 \theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity. The dominant wavelength is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Typical Electro–Optical Characteristic Curves (Ta=25°C)

Directive Characteristics


Reliability Test Conditions

Test Item	Test Condition	Result	Judgment Criteria
Consecutive operating life test	IF=20mA, T=25℃, t=168h	0/100	Forward Voltage VF(V)= Upper Limit × 1.2 Reverse Leakage Current IR(μ A)=Upper Limit × 2.0 Luminous Intensity IV (mcd)=Lower Limit × 0.7
High temperature storage life test	T=100℃, t=168h	0/100	
Low temperature storage life test	T=25℃, t=168h	0/100	
High temperature humidity storage life test	T=85 ± 2℃, RH=85% ± 3, t=168h	0/100	
Temperature cycle test	-25℃~25℃~100℃ 30min 5min 30min 10cycles	0/100	
Thermal shock test	100℃ 0℃ 5min 5min 20cycles	0/100	
Soldering heat test	T=260 ± 5℃, t=10s ± 1s	0/100	
Solderability test	T=235 ± 5℃, t=5s ± 0.5s	0/100	Steeped Part ≥ 95%
Fall test	h=100cm, 50times	0/100	Surface Appearance Photoelectric Properties Intact
Terminal strength test	W=9.8N, t=30 ± 5s	0/100	
Lead bending test	W=4.9N, 2times	0/100	

Luminous Intensity Ranks(IF=20mA Ta=25°C)

Bin Code	Min(mcd)	Max(mcd)
Z	3750	4500
ZA	4500	5400
ZB	5400	6480
ZC	6480	7700
ZD	7700	9300
ZE	9300	13400

Package

Item	Inner packaging bag	Inner packaging box
Material	Antistatic bag	Single corrugated box
Quantity	1000PCS	Single corrugated box×6 =6000PCS
Marking	Label Marking: Type、Quantity	Certificate of conformity Marking: Product name、 Type、Quantity、 Date of manufacture
Size	16×23(cm)	30×19×11.5(cm)